



Intersteel.dk

Sikringsbøjle

"Doorkeeper"

 **INTERSTEEL**

Beskyt dig mod tricktyve.!

De mest almindelige tricktyverier er, at en eller to personer ringer på døren og udgiver sig for at være fra hjemmeplejen, spørger dig om hjælp eller siger de skal aflæse El-måleren.

Kig i dørspionen før du lukker op.

Luk aldrig døren helt op hvis det er en person du ikke kender.

Intersteel "Doorkeeper" fungerer som en sikkerhedskæde hvor man kan åbne døren på klem og tale med personen inden du lukker døren helt op.

Sikringsbøjlen er meget stærkere end en traditionel sikkerhedskæde og har ingen led, som kan sprænges hvis der sparkes eller skubbes hårdt til døren.



Kraftig sikringsbøjle

Intersteel.dk



Sikringsbøjle

Anvendes til indgående døre



Leveres inkl. skruer

Materiale: Børstet rustfrit stål AISI304

Vare nr.: **35.480050**

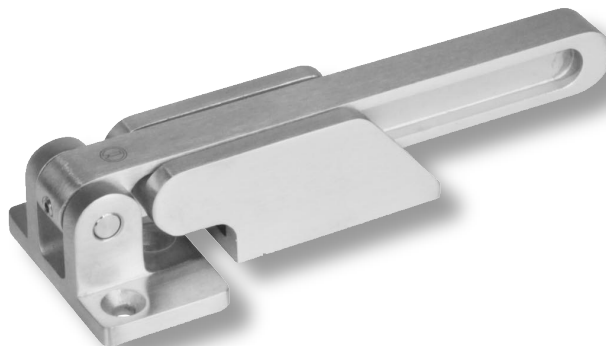

Anvendes til indadgående døre

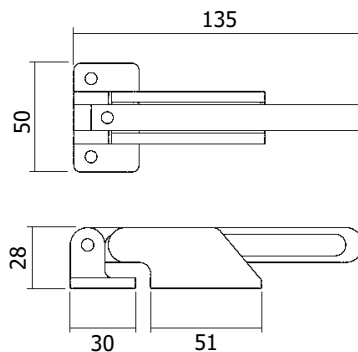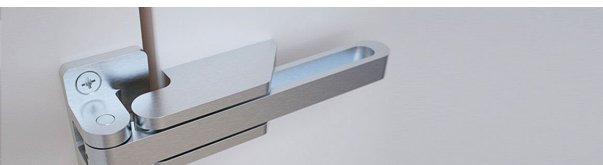

Kraftig sikringsbøjle

Intersteel.dk



Sikringsbøjle

Anvendes til udadgående døre


Leveres inkl. skruer

Materiale: Børstet rustfrit stål AISI304

Vare nr.: **35.480052**

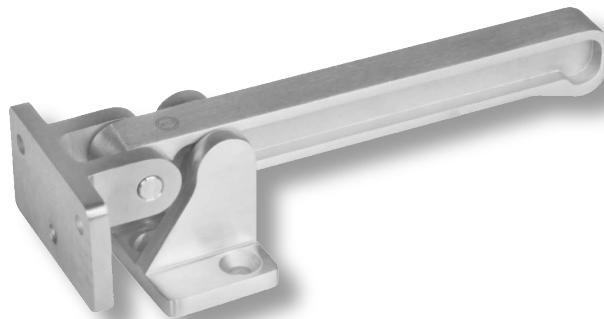


Anvendes til udadgående døre

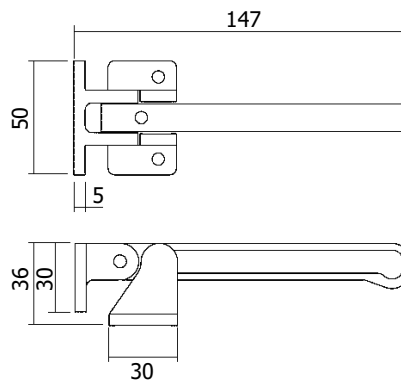

ENGLISH

How to install the INTERSTEEL Doorkeeper®

1. The recommended fitting height is around 145 cm. Mark this on the door frame.
2. Use the drilling template provided to mark the screw holes, whereby the interspace of the template must match the interspace between door and frame.
3. With hardwood first drill a pilot hole using a 2,5mm drill bit.

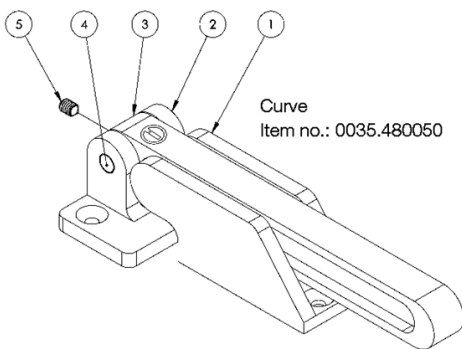


<https://www.youtube.com/watch?v=tSTCZ3fgLuk>

1. Door mounting plate
2. Frame mounting plate
3. Blocking arm
4. Pivot pin
5. Socket screw

4. Only use the supplied screws:
 - 4,0 x 40mm (x 2) for the door mounting plate
 - 4,0 x 60mm (x 3) for the frame mounting plate
5. Screw both parts of the Doorkeeper on tightly.
Put a little grease on the screw for easy mounting.

Note!

The INTERSTEEL Doorkeeper is only suitable for doors with a minimum door thickness of 40mm. The maximum door thickness is 65mm.

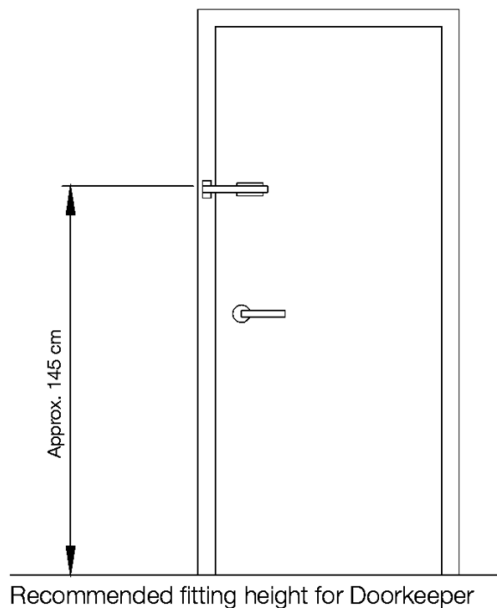



Intersteel - Danmark
T: +45-24231524
E: info@intersteel.dk
www.intersteel.dk